



Embedded software solutions

STM32 – STM8

A full portfolio and several models

2

- Extensive software ecosystem around the STM32 and STM8
- You will find your solution, fitting your requirements in terms of price, license and support

ST-designed software

- Built in-house, making the most of the STM32 and STM8
- Source code or binaries
- Supported by ST

Open source

- Proposed by community or partners
- Source code, from BSD or GPL licenses to commercial products
- Supported by open source community or partners

Partners

- Generic solutions proposed by many companies, portable to/from other platforms
- Source code or binaries
- Supported by partners

A large community of partners

HighIntegritySystems

interniche
technologies, inc.

KEIL
Tools by ARM

SEGGER

HCC
embedded

Quadros™
Systems Inc.

eCosCentric

CMX SYSTEMS

Green Hills®
SOFTWARE

embedded
solutions

freeRTOS

ARM

Micrium

embex

MESCO
Engineering

ANDREA
Informatique

eForce

MicroDigital

ALPWISE

port

JUNGO®
Connectivity Software ■■■

expresslogic

ClarinoX

embeddedlabs™
embedding OPC-UA

AVIX-RT

ARC CORE
The future is open

craftwork

VDE

Thesycon
Thesycon® Systemsoftware & Consulting GmbH

ST
life.augmented

MicroControl
Systemhaus für Automatisierung

mentor
embedded

RoweBots

euros®
Embedded Systems GmbH

Solutions at all levels

4

Application fields

Audio
applications

Motor control

Industrial

Automotive

...

Middleware

RTOS/
kernel

File
system

USB

TCP/IP

Bluetooth

Display

ZigBee

Touch
sensing

...

Development
and
execution
environments

Hardware abstraction layer (HAL)

Hardware dependent layer (HAL)

Hardware dependent layer

6

This layer is the first one to interact with the MCU hardware

- **Consistent programming interface**
 - When microcontrollers have different hardware implementations
- **Full microcontroller coverage**
 - All peripherals are handled



STM32 – Hardware dependent layer

7

Provider	Solution name	Model	Cost	Availability					
				F0	F1	F2	F4	L1	W
ST	<u>Standard peripheral library and CMSIS DSP library⁵</u>	Source	Free	Y	Y	Y	Y	Y	N
ST	<u>Class B guidelines</u>	Source ¹	Free	Y	Y	N ²	N ²	N ²	N
ST	Crypto library ³	Binaries	Free	N ²	Y	Y	Y	Y	N
ST	HAL library	Source	Free	N	N	N	N	N	Y ⁴

1/ Application note can be downloaded from ST web site. Software can be obtained on demand. Contact your local sales office.

2/ Can be ported.

3/ Subject to trade regulation, please contact our sales office.

4/ Part of ZigBee Simple MAC firmware. Please refer to the version ZigBee Middleware.

5/ DSP Library for STM32F4 only.




STM8 – Hardware dependent layer

8

Provider	Solution name	Model	Cost	Availability			
				S	A	L	T
ST	<u>Class B guidelines</u>	Source	Free	Y	Y	Y	Y
ST	<u>Standard peripheral library</u>	Source	Free	Y	Y	Y	Y ¹

1/ Available on demand. Contact your local sales office.



Focus – ST standard peripheral lib

9


Hardware abstraction layer is fully covering the STM32 or STM8 resources

- **Compliant with standards**
 - ANSI-C source code
 - Misra and ST coding rules
 - ARM-CMSIS compliant for STM32
- **A real help for developers**
 - Comes with a multitude of examples demonstrating usage

Focus – CMSIS DSP library

- **ARM CMSIS DSP library**

- Complete set of DSP algorithms, with examples
 - Math
 - Vectors
 - Statistics
 - Filters (FIR, IIR, ...)
 - Interpolation
 - Matrix
 - Transform (FFT, ...)
- Optimized for Cortex-M4 core, on integer and floating-point values

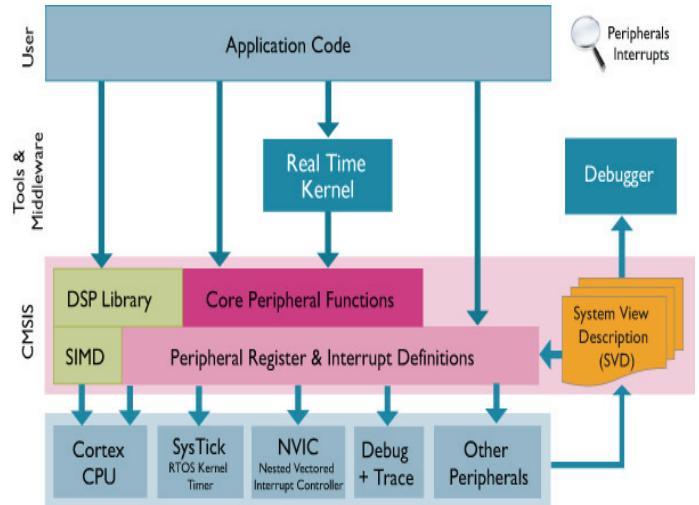

Middleware (USB, Ethernet, ...)

Middleware stacks fills the gap between hardware and your application.
ST and ST's partners bring the required solutions

- **All standard middleware covered**

- RTOS/kernel
- File system
- USB
- TCP/IP
- Bluetooth
- ZigBee
- ...

Middleware – RTOS/kernel

13

This is the root component to share time between several tasks on a single core. It ensures task switch within a more duration.

- **A multitude of solutions for the STM32 and STM8 available now**
 - New contributions are being added regularly



STM32 – RTOS / kernel (1/2)

14

Provider	Solution name	Model	Cost	Availability					
				F0	F1	F2	F4	L1	W
AVIX-RT	AVIX	Binaries	License	N	Y	Y	Y	Y	N
CMX	CMX-RTX	Source	License	Y	Y	Y	Y	Y	N
Chibios	ChibiOS/RT	Open source (GPL3) or Source	Free or License	Y	Y	Y	Y	Y	N
eCosCentric	eCosPro	Source ¹	License	N	Y	Y	Y	Y	N
eForce	μC3	Source	License	Y	Y	Y	Y	Y	N
Emcraft Systems	uCLinux	Open Source (GPL) ²	Free ²	N	N	Y	Y	N	N
EUROS	EUROSPlus	Binaries	License	N	Y	Y	Y	Y	N
Express Logic	ThreadX	Source	License	Y	Y	Y	Y	Y	N
FreeRTOS	FreeRTOS	Open source (modified GPL)	Free	Y	Y	Y	Y	Y	N
Green Hills	μ-velOSity	Source	License	Y	Y	Y	Y	Y	N
Keil/ARM	MDK-ARM RTX	Source	License	Y	Y	Y	Y	Y	N
Mentor	Nucleus Kernel	Source	License	N	Y	Y	Y	Y	N

1/ eCos is an open source kernel, a subset of eCosPro. eCosPro comes with TCP/IP stack, FAT, jFFS2, RAM and ROM FS

2/ uCLinux is open source, but this company proposes some ports on STM32. It requires some additional boards that they sell.
uCLinux can be much more than just a Kernel



STM32 – RTOS / kernel (2/2)

15

Provider	Solution name	Model	Cost	Availability					
				F0	F1	F2	F4	L1	W
Micrium	<u>μC-OS</u>	Source	License	Y	Y	Y	Y	Y	N
Micro Digital	<u>SMX</u>	Source	License	N	Y	Y	Y	Y	N
Quadros	<u>RTXC Rtos</u>	Source	License	Y	Y	Y	Y	Y	N
Rowebots	<u>Unison</u>	Source ¹	License	N	Y	Y	Y	Y	N
SEGGER	<u>embOS</u>	Source	License	Y	Y	Y	Y	Y	Y
SICS	<u>Contiki</u>	Open source (BSD)	Free	N	N	N	N	N	Y
High Integrity Systems	<u>OpenRTOS</u> ²	Source	License	Y	Y	Y	Y	Y	N
High Integrity Systems	<u>SafeRTOS</u> ³	Source	License	N ⁴	Y	N ⁴	N ⁴	N ⁴	N

1/ An Open Source version with less features is also available.

2/ OpenRTOS is FreeRTOS with commercial support

3/ SafeRTOS is OpenRTOS with Safety features and certificates

4/ Available on customer request. Please contact supplier



STM8 – RTOS/kernel

16

Provider	Solution name	Model	Cost	Availability			
				S	A	L	T
AtomThreads	<u>AtomThreads RTOS</u>	Open source (BSD)	Free	Y	N ¹	N ¹	N ¹
Chibios	<u>ChibiOS/RT</u>	Open source (GPL3) or Source	Free or License ²	Y	N ¹	Y	N ¹
CMX	<u>CMX-Tiny+</u>	Source	License	Y	N ¹	N ¹	N ¹
SEGGER	<u>embOS</u>	Source	License	Y	Y	Y	N ¹

1/ Could be very easily ported

2/ Contact supplier

Middleware – File system

17

A file system is the way in which files are named and how they are placed logically for storage and retrieval. Several standards exist, like FAT, JFFS2, ...

- **Some Safety solutions**

- Ensuring data is not corrupted in any way (power supply removal, ...)

- **Some NAND memory access solutions**

- With error correction and wear-leveling



STM32 – File system (1/2)

18

Provider	Solution name	Model	Cost	Availability					
				F0	F1	F2	F4	L1	W
ChaN	FatFS	Open source (BSD)	Free	Y ³	N				
CMX	CMX-FFS , CMX-FFS-FAT	Source	License	Y	Y	Y	Y	Y	N
eCosCentric	YAFFS (Nand), MMFS , JFFS2	Source	License ¹	N	Y	Y	Y	Y	N
Express Logic	FileX	Source	License	Y	Y	Y	Y	Y	N
EUROS	FMS	Binaries	License	N	Y	Y	Y	Y	N
HCC	SafeFAT , SafeFLASH , Safe-FTL , FAT16/32	Source	License	Y	Y	Y	Y	Y	N
Green Hills	μ-velOSity File System	Source	License	Y	Y	Y	Y	Y	N
Keil/ARM	MDK-ARM Flash	Source	License	Y	Y	Y	Y	Y	N
Mentor Embedded	Nucleus Storage	Source	License	N	Y	Y	Y	Y	N
Micrium	μC/FS	Source	License	Y	Y	Y	Y	Y	N
Micro Digital	smxFS	Source	License	N	Y	Y	Y	Y	N

1/ Free for non commercial usage.

2/ Available on customer request. Please contact supplier.

3/ FatFS ported on STM32 available on demos



STM32 – File system (2/2)

19

Provider	Solution name	Model	Cost	Availability					
				F0	F1	F2	F4	L1	W
Quadros	<u>RTXCfatfile</u>	Source	License	Y	Y	Y	Y	N ¹	N
Rowebots	<u>Unison FAT File System</u>	Source	License	N	Y	Y	Y	Y	N
SEGGER	<u>emFile</u>	Source	License	Y	Y	Y	Y	Y	Y
SICS	<u>Contiki/Coffee FS</u>	Open source (BSD)	Free	N	N	N	N	N	Y

1/ Available on customer request. Please contact supplier.



STM8 – File system

20

Provider	Solution name	Model	Cost	Availability			
				S	A	L	T
ChaN	<u>Petit FatFS</u>	Open source (BSD)	Free	N ¹	N ¹	Y ²	N ¹
HCC	<u>FAT THIN</u>	Source	License	Y	Y	Y	Y
SEGGER	<u>emFile</u>	Source	License	Y	Y	Y	N ¹

1/ Could be very easily ported.

2/ Petit FatFS ported on STM8 available on demos



Middleware – USB

21

Universal Serial Bus requires a dedicated software stack. This serial bus is organized in a star topology with host and device roles, host organizing the traffic. Several device classes are specified, in order to ease communication in different application cases

- ST provides a complete offer for STM32

Often seen acronyms

OTG	On-The-Go: An OTG peripheral can switch host and device role on the fly
HUB	Defines what protocols to implement to build a hub application
MS	Mass storage: Protocols to interact with storage block devices (for files)
HID	Human interface device: Protocols for peripherals interacting with human body (mouse, keyboard, etc.)
CDC	Communication device class: Protocols for serial communications, different sub-classes define details, for instance ACM for a standard COM port, or ECM for modems
Printer	Defines what protocols to implement to build a printer application
Audio	Defines what protocols to implement to build an audio application (microphone, headset, etc.)
DFU	Device firmware upgrade: Protocols to implement firmware upgrade ability



STM32 – USB solutions (1/2)

22

Provider	Solution name	Model	Cost	Availability			
				F1	F2	F4	L1
CMX	<u>CMX-USB</u>	Source	License	Y	Y	Y	Y
EUROS	<u>USB Host & Device</u>	Binaries	License	Y	Y	Y	Y
Express Logic	<u>USBX</u>	Source	License	Y	Y	Y	Y
HCC	<u>HCC-USB</u>	Source	License	Y	Y	Y	Y
Jungo	<u>USBware</u>	Source	License + royalties	On demand			
Keil/ARM	<u>MDK-ARM USB</u>	Source	License	Y	Y	Y	Y
Mentor Embedded	<u>Nucleus USB</u>	Source	License	Y	Y	Y	Y
Micrium	<u>µC/USB</u>	Source	License	Y	Y	Y	Y
Micro Digital	<u>smxUSB</u>	Source	License	Y	Y	Y	Y
Quadros	<u>RTXCusb</u>	Source	License	Y	Y	Y	N ¹
Rowebots	<u>Unison USB System</u>	Source	License	Y	Y	Y	Y
SEGGER	<u>emUSB</u>	Source	License	Y	Y	Y	Y

1/ Available on customer request. Please contact supplier



STM32 – USB solutions (2/2)

23

Provider	Solution name	Model	Cost	Availability				
				F1	F105/107	F2	F4	L1
ST	<u>USB FS device library</u>	Source	Free	Y	N	N	N	Y
ST	<u>USB FS&HS Host&Device lib</u>	Source	Free	N	Y	Y	Y	N
ST	Continua USB certified stack ²	Source	Free	N ¹	N ¹	N ¹	N ¹	Y
Thesycon	<u>Embedded USB Device</u>	Source	License	N ¹	N ¹	Y	Y	N ¹

1/ Available on customer request. Please contact supplier

2/ Available to Continua members only. Refer to your local ST sales office.



STM32 – USB solutions details (1/2)

24

Provider	Solution name	Details
CMX	<u>CMX-USB</u>	Device: HID, MS, CDC (ACM, ECM, RNDIS), Audio, Midi, MTP, PHDC Host: HID, MS, CDC (ACM, ECM, RNDIS, OBEX), Audio, Midi, Printer, HUB
EUROS	<u>USB Host & Device Stack</u>	Device: HID, MS, CDC (ACM, ECM) Host: HID, MS, CDC (ACM, ECM), HUB
Express Logic	<u>USBX</u>	Device: HID, MS, CDC (ACM, ECM, RNDIS), Still Image, PTP, PictBridge Host: HID, MS, CDC (ACM, ECM), Audio, Printer, HUB, Prolific
HCC	<u>HCC-USB</u>	Device: HID, MS, CDC (ACM, ECM, RNDIS), Printer, Audio, Midi, MTP, Still Image Host: HID, MS, CDC (ACM, ECM, RNDIS), Audio, Midi, Printer, HUB
Jungo	<u>USBWare</u>	Device: HID, MS, CDC (ACM, ECM, RNDIS, WMC, OBEX), Audio, Video, SICD, PTP, MTP, PictBridge, CCID, DFU Host: HID, MS, CDC (ACM, ECM, EEM, NCM), Audio, Video, PTP, MTP, ICCD, iPod, HUB
Keil/ARM	<u>MDK-ARM USB</u>	Device: HID, MS, CDC (ACM), Audio Host: HID, MS
Mentor Embedded	<u>Nucleus USB</u>	Device: HID, MS, CDC (ACM, ECM) Host: HID, MS, CDC (ACM, ECM), HUB
Micrium	<u>μC/USB</u>	Device: HID, MS, CDC (ACM), Audio, PHDC (Medical) Host: HID, MS, CDC (ACM), Audio, Printer, PHDC (Medical)
Micro Digital	<u>smxUSB</u>	Device: HID, MS, CDC (ACM, RNDIS, Single Interface and mult. ports), Audio, Video, Midi, PTP, MTP, DFU Host: HID, MS, CDC (ACM), Audio, Printer, HUB
Quadros	<u>RTXCusb</u>	Device: MS, CDC (ACM, ECM, RNDIS) Host: HID, MS, CDC (ACM), HUB
Rowebots	<u>Unison USB System</u>	Device: MS, CDC (ACM) Host: MS, CDC (ACM), HUB, others on demand (inc . PHDC)
SEGGER	<u>emUSB</u>	Device: HID, MS, CDC (ACM), Printer Host: HID, MS, CDC (ACM), Printer



STM32 – USB solutions details (2/2)

25

Provider	Solution name	Details
ST	<u>USB FS device library</u>	Device: HID, MS, CDC (ACM), Audio, DFU, PHDC (with below Continua package)
ST	<u>USB FS&HS Host&Device</u>	Device: HID, MS, CDC (ACM), Audio, DFU Host: HID, MS
ST	Continua USB certified stack	USB PHDC Class (Personal Health Device Class), 11073-20601 = Base Framework. Agents: 1073-10417 = Glucose, 11073-10408 = Thermometer Other Agents can be implemented on demand
Thesycon	<u>Embedded USB Device</u>	Device: HID, MS, CDC (ACM, ECM, NCM)



Middleware – TCP/IP (1/2)

26

TCP and IP were developed by a U.S. Department of Defense research project to connect a number different networks designed by different vendors into a network of networks (the "Internet").

It was initially successful because it delivered a few basic services that everyone needs (file transfer, electronic mail, remote logon) across a very large number of client and server systems, and is now widely deployed.



Middleware – TCP/IP (2/2)

27

Often seen acronyms

ARP	Address resolution protocol: Provides physical address from IP address
IP	Internet protocol: Primary protocol in Internet Protocol Suite. 2 flavors: IPv4 and IPv6. IPv4 will disappear as it only supports up to 2^{32} addresses, not enough for future needs, while IPv6 supports 2^{128}
6LoWPAN	IPv6 over low power wireless personal area networks: Provides IPv6 connectivity to low rate wireless networks
IPSec	Internet protocol security: Secured version of IP, using cryptography
TCP	Transmission control protocol: Provides reliable, ordered delivery of a stream of bytes
UDP	User datagram protocol: Provides unreliable service. Datagrams may arrive in any order, duplicated, or may be missing. Used for time-sensitive applications, when data drop is better than delay
DHCP	Dynamic host configuration protocol: Provides means to allocate IP address dynamically
DNS	Domain name system: Translates domain names meaningful to humans into numerical IP ones
FTP	File transfer protocol: Provides means to copy files from one host to another
TFTP	Trivial file transfer protocol: Similar to FTP, but based on UDP, and simpler (for example, no directory)
SMTP	Simple mail transfer protocol: Used to send e-mail to a server
POP	Post office protocol: Used to retrieve e-mail from a server
HTTP	Hypertext transfer protocol: Used by web browsers
SSL/TLS	Transport layer security: Secured container for application protocols using cryptography. Example: HTTPS means HTTP over SSL, FTPS, etc.. IPSec applies cryptography at a lower level than SSL/TLS, making it more universal. However SSL is widely used.
Wi-Fi	Wi-Fi is an implementation of the IEEE 802.11 radio communication specification. It is usually used with a TCP/IP stack, so all TCP/IP bricks can be reused on Wi-Fi, adapting the lowest firmware layer.



STM32 – TCP/IP solutions (1/2)

28

Provider	Solution name	Model	Cost	Availability			
				F107	F2	F4	W
CMX	<u>CMX-TCP/IP</u> , <u>CMX-MicroNet</u>	Source	License	Y	Y	Y	N
EUROS	<u>TCP/IP stack</u>	Binaries	License	Y	Y	Y	Y
Express Logic	<u>NetX and NetX Duo IPv4/IPv6</u>	Source	License	Y	Y	Y	N
eCosCentric	<u>SecureSockets</u> , <u>SecureShell</u>	Source	License	Y	Y	Y	N
eForce	<u>μNet3</u>	Source	License	Y	Y	Y	N
Green Hills	<u>μ-velOSity TCP/IP v4/v6</u>	Source	License	Y	Y	N ¹	N
HCC	<u>MISRA HCC-TCP/IP v4/v6</u>	Source	License	Y	Y	Y	N
Interniche	<u>NicheLite</u>	Source	Free	Y	Y	Y	N
Interniche	<u>NicheStack</u>	Source	License	Y	Y	Y	N
Interniche	<u>embTCP v4/v6</u>	Binaries	License	N	Y	Y	N
Keil/ARM	<u>MDK-ARM TCPNET</u>	Source	License	Y	Y	Y	N
SICS	<u>LwIP</u>	Open source (BSD)	Free	Y ²	Y ²	Y ²	N
Mentor Embedded	<u>Nucleus Network</u>	Source	License	Y	Y	Y	N

1/ Available on customer request. Please contact supplier

2/ A port to STM32 was implemented by ST



STM32 – TCP/IP solutions (2/2)

29

Provider	Solution name	Model	Cost	Availability			
				F107	F2	F4	W
Micrium	μC/TCP-IP	Source	License	Y	Y	Y	N
Micro Digital	smxNS and smxNS6 (Dual IPv6/v4)	Source	License	Y	Y	Y	N
PolarSSL	PolarSSL	Open source (GPL2) or Source	Free or license	Y ²	Y ²	Y ²	N
Quadros	RTXC Quadnet	Source	License	Y	Y	Y	N
Rowebots	Unison TCP-IP/v4-v6	Source	License	Y	Y	Y	N
SEGGER	embOS/IP	Source	License	Y	Y	N ¹	N
SICS	Contiki/uIP6	Open source (BSD)	Free	N	N	N ¹	Y

1/ Available on customer request. Please contact supplier

2/ A port to STM32 was implemented by ST

STM32 – TCP/IP solutions details (1/2)

Provider	Solution name	Details
CMX	<u>CMX-TCP/IP</u>	PPP, PPPoE, ARP, IGMP, ICMP, IPv4, UDP, TCP, DHCP(cs), DNS, FTP(cs), IMAP4, NAT, POP3(c), SMTP, SNMP, SNTP, Telnet(s), SSL/TLS, TFTP(c), HTTP(s)
CMX	<u>CMX-MicroNet</u>	PPP, ARP, IGMP, ICMP, IPv4, UDP, TCP, DHCP(c), DNS, FTP(cs), POP3(c), SMTP, SNMP, SNTP, Telnet(s), SSL/TLS, TFTP, HTTP(s)
EUROS	<u>TCP/IP stack</u>	PPP, PPPoE, ARP, IGMP, ICMP, IPv4, IPv6, IPSec/IKE, UDP, TCP, DNS, DHCP(cs), FTP(cs), NAT, POP3(c), SMTP, SNMP, SNTP, Telnet(s), SSL/TLS, TFTP, HTTP(cs)
Express Logic	<u>NetX and NetX Duo IPv4/IPv6</u>	PPP, ARP, IGMP, ICMP, IPv4, IPv6, IPSec/IKE, UDP, TCP, DNS, DHCP(c), FTP(cs), NAT, POP3(c), SMTP, SNMP, SNTP, Telnet(s), TFTP, HTTP(s)
eCosCentric	<u>SecureSockets</u>	SSH2
eCosCentric	<u>SecureShell</u>	SSL/TLS
eForce	<u>μNet3</u>	PPP, ARP, IGMP, ICMP, IPv4, IPv6, UDP, TCP, DNS, DHCP(c), FTP(s), SSL/TLS
HCC	<u>MISRA HCC-TCP/IP v4/v6</u>	ARP, ICMP, IPv4, IPv6, UDP, TCP, DNS, DHCP(c), FTP(s), SMTP, TFTP(s), HTTP(s)
Green Hills	<u>μ-velOSity TCP/IP v4/v6</u>	ARP, ICMP, IGMP, IPv4, IPv6, IPv4/6, UDP, TCP, DNS, DHCP(c),
Interniche	<u>NicheLite</u>	ARP, ICMP, IPv4, UDP, TCP, DNS, DHCP(c), FTP(s), Telnet(s), TFTP
Interniche	<u>NicheStack</u>	SLIP, PPP, PPPoE, ARP, IGMP, ICMP, IPv4, IPv6, IPSec/IKE, UDP, TCP, DNS, DHCP(cs), FTP(cs), NAT, POP3(c), SMTP, SNMP, SNTP, Telnet(s), SSL/TLS, TFTP, HTTP(s), RTP/RTCP, SSH
Interniche	<u>embTCP v4/v6</u>	ARP, TCP/IP v4, IPv4/v6 HTTP, FTP Telnet ICMP, UDP, TCP, DNS, DHCP
Keil/ARM	<u>MDK-ARM TCPNET</u>	SLIP, PPP, ARP, IPv4, ICMP, UDP, TCP, DNS, DHCP(c), FTP(s), SMTP, SNMP, Telnet(s), TFTP(s), HTTP(s)
SICS	<u>LwIP</u>	PPP, ARP, ICMP, IPv4, UDP, TCP, DHCP(c)
Mentor Embedded	<u>Nucleus Kernel</u>	PPP, PPPoE, ARP, IGMP, ICMP, IPv4, IPv6, IPSec/IKE, UDP, TCP, DHCP(c), FTP(cs), NAT, SNMP, SNTP, Telnet(cs), SSL/TLS, TFTP (cs), HTTP(cs)

STM32 – TCP/IP solutions details (1/2)

31

Provider	Solution name	Details
Micrium	<u>µC/TCP-IP</u> (and <u>µC/SSL</u>)	ARP, ICMP, IPv4, UDP, TCP, DNS, DHCP(c), FTP(cs), SMTP, POP3(c), SNTP, Telnet(s), SSL/TLS, TFTP, HTTP(s)
Micro Digital	<u>smxNS</u> and <u>smxNS6 (Dual IPv6/v4)</u>	SLIP, PPP, PPPoE, ARP, IGMP, ICMP, IPv4, IPv6, IPv4/6, UDP, TCP, DNS, mDNS, DHCP(cs), FTP(cs), NAT, POP3(c), SMTP, SNMP, SNTP, Telnet(s), SSL/TLS, TFTP, HTTP(cs), RTP/RTCP, SSH
PolarSSL	<u>PolarSSL</u>	SSL/TLS
Quadros	<u>RTXC Quadnet</u>	PPP, PPPoE, ARP, IGMP, ICMP, IPv4, IPv6, IPSec/IKE, UDP, TCP, DNS, DHCP(cs), FTP(cs), NAT, POP3(c), SMTP, SNMP, SNTP, Telnet(s), SSL/TLS, TFTP, HTTP(cs), UPnP, Prioritized Packets Handling
Rowebots	<u>Unison TCP-IP/v4-v6</u>	PPP, ARP, ICMP, IGMP, IPv4, IPv6, IPv4/6, 6LowPan, IPSec, UDP, TCP, DNS, DHCP(cs), SMTP(c), SNMP, Telnet(s), TFTP(cs), HTTP(cs), NAT
SEGGER	<u>embOS/IP</u>	PPP, PPPoE, ARP, ICMP, IGMP, IPv4, UDP, TCP, DNS, DHCP(c), FTP(cs), SMTP(c), Telnet(s), TFTP(cs), HTTP(s)
SICS	<u>Contiki/uIP6</u>	IPv6, 6LoWPAN



Middleware – Bluetooth

32

Bluetooth is a wireless communication technology for exchanging data over short distances, typically used in the mobile world between phones and accessories.

- **Solutions with STM32 + Bluetooth transceiver**

- Several solutions are available, using STM32 with ST's [STA2500D](#) or ST-Ericsson's [STLC2690](#) or other components

Often seen acronyms

HCI	Host/controller interface: Standardized communication between controller and radio chips
SPP	Serial port profile: Profile that emulates serial line over Bluetooth
A2DP	Advanced audio distribution profile: Profile to stream high quality audio
HSP	Headset profile: Profile to implement a basic headset application
HDP	Health device profile: Profile designed to facilitate transmission and reception of medical data
HFP	Hands-free profile: Typical profile used in cars for hands-free phone usage. Implements more features than HSP, such as voice dialing or last number redial



STM32 – Bluetooth solutions

33

Provider	Solution name	Model	Cost	Availability					
				F0	F1	F105/107	F2	F4	L1
Alpwise	<u>iAnywhere Blue SDK 3.x</u>	Binaries or Sources	License + royalties	N ²	Y	Y	Y	N ¹	Y
Alpwise	<u>iAnywhere Blue SDK 4.x</u>	Binaries or Sources	License + royalties	N	N	N	Y	N ¹	N
Alpwise	<u>ALPW-BLESDK</u>	Binaries or Sources	License + royalties	Y	Y	Y	Y	N ¹	Y
Jungo	<u>BTware</u>	Sources	License+ royalties	On demand					
Clarinox	<u>ClarinoxBlue</u>	Binaries or Sources	License and/or royalties	On demand					

1/ Available on customer request. Please contact supplier

2/ Available on specific conditions. Please contact supplier

STM32 – Bluetooth solutions details

34

Provider	Solution name	Details
Alpwise	<u>iAnywhere Blue SDK 3.x</u>	BT2.1 + EDR, BT3.0, BT3.0 + HS Supported profiles: AD2P, AVRCP, HFP, HSP, HID, OBEX, FTP, OPP, SPP and more
Alpwise	<u>iAnywhere Blue SDK 4.x</u>	BT4.0 BLE Dual Mode Supported profiles: AD2P, AVRCP, HFP, HSP, HID, OBEX, FTP, OPP, SPP and more
Alpwise	<u>iAnywhere</u>	BT4.0 BLE Single Mode Supported profiles: GAP, GATT, Proximity, Find Me, Heart Rate, Health Thermometer, Alert Notification, Time and more
Jungo	<u>BTware</u>	BT2.1+EDR, BT3.0 Supported profiles: A2DP, AVRCP, HFP, HSP, HDP HID, FTP, SPP, iPod, and more
Clarinox	<u>ClarinoxBlue</u>	BT2.1+EDR Supported profiles: HCI, L2CAP, RFCOMM, SDP, SDAP, GAP, SPP, AVRCP, A2DP, ADVTP, GAVDP, HFP, HSP, IOP, MAP, PBAP



Middleware – ZigBee

35

With short messages, ZigBee offers green wireless standards to connect a wide range of devices so they work together intelligently and help you control your world.

- **Full coverage of STM32W built-in Radio**
 - STM32W family embeds an IEEE 802.15.4 2.4 GHz compliant radio supporting ZigBee and proprietary protocols

Often seen acronyms

ZigBee RF4CE	Wireless protocol stack for low data rate, low power optimized for consumer electronics. Applications include remote control, mice, keyboards, 3D goggles.
ZigBee PRO	Wireless protocol stack for low data rate, low-power applications using mesh routing. Supports home automation, building automation and smart energy 1.x applications.
ZigBee IP	Wireless protocol based on IPv6/6LowPan targeting next generation smart energy/smart grid applications.
ZRC	Remote control application profile supported by ZigBee RF4CE for consumer electronics.
ZID	ZigBee human interface device application profile supported by ZigBee RF4CE for mice, keyboards, etc.
ZHA	Home automation application profile supported by ZigBee PRO protocol stack.
ZSE	ZigBee smart energy application profile supported by ZigBee PRO and ZigBee IP protocol stacks.



STM32 – ZigBee solutions

36

Provider	Solution name	Model	Cost	Availability
				W
ST	<u>Simple MAC firmware</u>	Binaries	Free	Y
ST	<u>ZigBee RF4CE</u>	Binaries	Free	Y
Sensinode	ZigBee IP stack	Binaries	Free	Q4/12



Middleware – Display

37

ST microcontrollers can drive displays through serial or parallel interfaces.

- **Getting the most from hardware and software**

- ST has built a close relationship with partners providing software solutions based on our microcontrollers. Customers can make the most of their hardware

Often seen acronyms

Anti aliasing	Technique to minimize distortion artifacts known as aliasing when presenting a high-resolution image at a lower resolution. Aliased images show some stair effects on curves. Anti-aliasing removes this by modifying edge pixel colors.
Alpha blending	Alpha blending is the process of combining a translucent foreground color with a background color, thereby producing a new blended color.
GUI	Graphical user interface
bpp	Bits per pixel (also known as color depth: Number of bits used to represent the color of a single pixel in an image. 1 bpp corresponds to monochrome images.)
Palette	Technique to lower image memory size by storing the set of colors used in a table and using this table for each pixel
JPEG	Commonly used method of lossy compression for digital image. The degree of compression can be adjusted, allowing a trade-off between storage size and image quality. JPEG typically achieves 10:1 compression with little perceptible loss in image quality.
RGB	Color model in which red, green and blue are merged to reproduce a broad array of colors.
Widgets	Element of a graphical user interface that can be changed by the user (such as text box, radio button)

STM32 – Display solutions

Provider	Solution name	Model	Cost	Availability				
				F0	F1	F2	F4	L1
Altia	<u>Altia Design</u>	Source	License	N ¹	N ¹	Y	Y	N ¹
EUROS	<u>eGUI</u>	Binaries	License	N ¹	Y	Y	Y	Y
Express Logic	<u>PEGX</u>	Source	License	Y	Y	Y	Y	N ¹
ST	<u>Embedded GUI library</u>	Source	Free	N	Y	Y	Y	Y
Mentor Embedded	<u>Infexion UI</u>	Binaries	License	N	N	Y	Y	N
Micrium	<u>μC/GUI</u>	Source	License	Y	Y	Y	Y	Y
Micro Digital	<u>C/PEG, PEG+, PEG Pro</u>	Source	License	N ¹	Y	Y	Y	N ¹
Quadros	<u>C/PEG, PEG+, PEG Pro</u>	Source	License	N ¹	Y	Y	Y	N ¹
Rowebots	<u>Remedy GraphXgen</u>	Source	License	N	Y	Y	Y	N ¹
SEGGER	<u>emWin</u>	Source	License	Y	Y	Y	Y	Y

1/ Available on customer request. Please contact supplier



Middleware – Touch sensing

39

Capacitive Touch Sensing is an electrical cost-efficient technology, replacing conventional mechanical switches to detect user actions, to build modern GUI look&feel.

- **NRE/Royalty free C source code**

- Complete solution for touch keys, linear and rotary touch sensors, with acquisition, post processing and API layers, debounce filtering and calibration functions

Often seen acronyms

Surface Capacitance	The capacitance of a single ended electrode is modified when the finger gets close to it.
Projected Capacitance	The capacitance between two sensing electrodes is modified when the finger gets close to them.
RC acquisition	Resistor-Capacitor acquisition for surface capacitance only. It consists in measuring the charge and discharge time duration of a RC cell made of the electrode capacitance and a load resistor.
CT acquisition	Charge Transfer acquisition for surface capacitance only. It consists in measuring the duration for charging the electrode capacitance and transferring part of the accumulated charge into a sampling capacitor. The CT acquisition is more robust than the RC one.
ProxSense™ acquisition	Charge Transfer acquisition for projected capacitance. This acquisition offers enhanced features such as integrated sampling capacitor, automatic electrode tuning, electrode parasitic capacitance compensation, ... The ProxSense acquisition is more robust than the CT one.



STM32 – Touch Sensing solutions

40

Provider	Solution name	Acquisition	Model	Cost	Availability				
					F0	F1	F2	F4	L1
ST	<u>STM32 Touch Sensing Library</u>	CT	Source	Free	Q4/12	N	Y	N	N



STM8 – Touch Sensing solutions

41

Provider	Solution name	Acquisition	Model	Cost	Availability			
					S	A	L	T
ST	<u>STM8 Touch Lib</u>	RC + CT	Source	Free	Y ¹	N ²	Y ¹	N
ST	<u>STM8TL5xxx Touch Lib</u>	ProxSense™	Source	Free	N	N	N	Y

1/ RC for STM8S, RC and CT for STM8L

2/ Available on customer request.

Application fields (audio, motor,...)



Application field – Audio

43

- **A complete solution for all audio aspects**
 - All audio aspects can be covered by solutions from ST or partners or STM32
- **Optimized for ST products**
 - Unlike open-source non-optimized solutions, ST works with partners to propose optimized algorithms for ST platforms

Often seen acronyms

Codec	A codec is a program capable of encoding and decoding a digital data stream. The encoded stream can be compressed or not, with a lossy (MP3, WMA, ...) or lossless (FLAC, ALAC, ...) mechanism.
PCM	Pulse-code modulation: Digital representation of an analog signal, in which the magnitude of the analogue signal is sampled regularly, each sample being quantized to the nearest value within a range of digital steps.
AAC, MP3, WMA	Music codecs with patents. Royalties need to be paid to patent owners.
Vorbis	Open source, no royalties music codec
Speex	Open source, no royalties speech codec
G711	Simple codec with no royalties often used in telephony
G726	ADPCM (adaptive differential pulse code modulation): Simple compression of PCM data



STM32 – Audio solutions

44

Provider	Solution name	Model	Cost	Availability					
				F0	F1	F105 /107	F2	F4	L1
ST	ADPCM Vocoder , Speex Vocoder	Source	Free	N	Y	N ¹	N ¹	N ¹	N ¹
ST	G711, G726, G726A Vocoders	Source	Free	N	N ¹	N ¹	Q4/12	Q4/12	N ¹
ST	MP3 Decoder	Binaries	Free	N	N ¹	Y	Y	Y	N ¹
ST	MP3 Codec	Binaries	Free	N	N ¹	Y	Y	Y	N ¹
ST	WMA Decoder	Binaries	Free	N	N ¹	Y	Y	Y	N ¹
ST	AAC-LC, HE-AAC+ v1, HE-AAC+ v2	Binaries	Free	N	N ¹	Q4/12	Q4/12	Q4/12	N ¹
ST	iAP Library (iPod/iPhone/iPad) ²	Source	Free	Q1/13	N	Y	Y	Y	N
ST	USB audio class and stream synchro. (feedback pipe, external PLL, ...)	Binaries	Free	N	N	Y	Y	Y	N
ST	Source Rate Converter	Binaries	Free	N	Y	Y	Y	Y	N ¹
ST	Channel mixer ³	Binaries	Free	N	Y	Y	Y	Y	N ¹
ST	Equalizer ³	Binaries	Free	N	Y	Y	Y	Y	N ¹
ST	Loud control ³	Binaries	Free	N	N ¹	Y	Y	Y	N ¹
DSPConcept	Audio Weaver	Binaries	License	N	N	N	N	Y	N
Craftwork	Remote Speakers (DLNA Media Renderer)	Binaries	License	N	N	N	N	Y	N

1/ The library will run immediately on these targets, even if not ported officially.

2/ Only available by request to local sales for companies being a licensee of Apple Mfi.

3/ Delivered with music codecs/decoders.



Focus – STM32 audio music codec's

45

- **De facto standards support**
 - Support for popular MP3 and WMA key formats, AAC coming !
- **More than just a codec**
 - Comes with must-have add-ons such as
 - Channel mixer utility (for volume and mute control)
 - Standalone 5-band parametric equalizer utility
 - Loudness control utility
- **Beyond open-source standard approach**
 - Optimized for Cortex-M

Firmware brick	STM32F2 Mips	STM32F4 Mips	Flash in bytes		RAM in bytes
			Code	Const	
MP3 decoder	21	10	15508	7108	12344



Application field – Industrial

46

The industrial market needs are very fragmented in terms of communication protocols. Many different protocols are available for different target applications in lighting, automation, metering and others.

- **Benefit from ST's extensive partner network**

- With ST's extensive partner network, our customers can easily find their required industrial protocol solution

Stack	Meaning
EtherCAT, Profinet, Ethernet/IP, Powerlink ...	Industrial Ethernet protocols for factory automation. Ethernet field buses are the latest trend in this application domain.
Profibus PA	Standard for field bus communication in automation technology (PA – process automation). Originally designed for EIA-485 but also available for fiber optics. Profibus is an open standard.
CANopen	Based on CAN physical layer. Industrial Ethernet protocols very often support the CANopen device profiles.
J1939	Standard used for communication and diagnostics with vehicle components (e.g. agricultural machines).
DeviceNet	Based on CAN physical layer. The common industrial protocol (CIP) is an industrial protocol for industrial automation applications. CIP is used in Ethernet/IP and DeviceNet.
Modbus	Originally designed for EIA-485. Modbus TCP is its Ethernet variant.
OPC-UA server	OPC defines communication of real-time process data over Ethernet between industrial equipment from different manufacturers (process instrumentation). All SCADA/HMI products support OPC-UA.
IO-Link	IO-Link is used for the lowest field level communication. It offers an additional and integrated digital data channel down to the smallest sensor and actuator in factory automation.

STM32 – Industrial solutions (1/3)

Provider	Solution name	Application	Model	Cost	Availability			
					F1	F2	F4	L1
Andrea Informatique	<u>DLMS / COSEM</u>	Metering	Binaries	License	Y	Y	N ¹	Y
Embedded Labs	<u>OPC-UA server</u>	Factory and building automation	Binaries	License + royalties	N	Y	Y	N
Embedded Solutions	<u>Modbus RTU/ASCII</u>	Factory automation	Binaries	License + royalties	Y	Y	N ¹	N
eCosCentric	<u>eCosPro-CAN</u>	Factory Automation	Sources	License	Y	Y	N ¹	N
eCosCentric	<u>CANopen</u>	Factory Automation	Sources	License	Y	Y	N ¹	N
Embex	<u>IO-Link</u>	Factory automation	Binaries	License + royalties	Y	N	N ¹	N
IXXAT	<u>CANopen</u>	Automation, medical	Source	License	Y	Y	N ¹	N
IXXAT	<u>DeviceNet</u>	Factory Automation	Source	License	Y	Y	N ¹	N
IXXAT	<u>J1939</u>	Commercial vehicles	Source	License	Y	Y	N ¹	N
IXXAT	<u>ModbusTCP</u>	Factory automation	Source	License	Y	Y	N ¹	N
IXXAT	<u>Ethernet/IP³</u>	Factory automation	Source	License	N ¹	Y	N ¹	N
IXXAT	<u>PROFINET³</u>	Factory automation	Source	License	N	N ²	N	N

1/ Please contact supplier.

2/ Possible with external memory usage

3/ Also possible with external HW to support Real Time features

STM32 – Industrial solutions (2/3)

Provider	Solution name	Application	Model	Cost	Availability			
					F1	F2	F4	L1
IXXAT	<u>POWERLINK</u> ¹	Factory automation	Source	License	Y	Y	N ²	N
IXXAT	<u>EtherCAT</u> ³	Factory automation	Source	License	Y	Y	N ²	Y
IXXAT	<u>Sercos III</u> ³	Factory automation	Source	License	Y	Y	N ²	Y
IXXAT	<u>IEEE1588 PTP</u>	Factory automation	Source	License	Y	Y	N ²	N
IXXAT	<u>openSAFETY</u>	Factory automation	Open source	Free	Y	Y	N ²	N
MESCO	<u>IO-Link</u>	Factory automation	Binaries	License + royalties	Y	N	N ²	N
MESCO	<u>Profibus PA</u>	Factory automation	Binaries	License + royalties	Y	N	N ²	Y
MESCO	<u>HART Master/Slave</u>	Process automation	Source	License + royalties	Y	Y	N ²	N
MESCO	<u>Modbus</u>	Factory automation	Source	License + royalties	Y	N	N ²	N
MicroControl	<u>DeviceNet</u>	Factory automation	Binaries	License + royalties	Y	Y	N ²	N
MicroControl	<u>EtherCAT</u>	Factory automation	Binaries	License + royalties	N	Y	N ²	N
MicroControl	<u>CANopen</u>	Factory automation	Binaries	License + royalties	Y	Y	N ²	N
Micrium	<u>uC/Modbus</u>	Factory automation	Source	License	Y	Y	N ²	N
Port	<u>CANopen</u>	Factory automation	Source	License	Y	Y	N ²	N

1/ Also possible with external HW to support Real Time features

2/ Please contact supplier

3/ Requires external HW



STM32 – Industrial solutions (3/3)

49

Provider	Solution name	Application	Model	Cost	Availability			
					F1	F2	F4	L1
Port	<u>Modbus RTU/ASCII</u>	Factory automation	Source	License	Y	Y	N ²	N
Port	<u>DeviceNet</u>	Factory automation	Source	License	Y	Y	N ²	N
Port	<u>EtherCAT</u> ³	Factory automation	Source	License	Y	Y	N ²	N
Port	<u>PROFINET</u>	Factory automation	Source	License	N	Y	N ²	N
Port	<u>EtherNet/IP</u> ³	Factory automation	Source	License	Y	Y	N ²	N
Port	<u>ModbusTCP</u> ³	Factory automation	Source	License	Y	Y	N ²	N
Port	<u>POWERLINK</u> ³	Factory automation	Source	License	Y	Y	N ²	N
PTPd	<u>PTPd</u>	Factory automation	Open source (BSD) ¹	Free	N	N ²	N ²	N
ST	<u>DMX</u>	Lighting/home & building automation	Source ⁴	Free	Y	N ²	N ²	N ²
TMG	<u>IO-Link</u>	Factory automation	Source	License	Y	Y	Y	Y
TMG	<u>Profibus DP and PA</u>	Factory automation	Source	License	Y	Y	Y	Y
TMG	<u>Profinet</u>	Factory automation	Source	License + royalties	N	Y	Y	N
TMG	<u>Ethernet/IP</u>	Factory automation	Source	License + royalties	N	Y	Y	N

1/ PTPd ported on STM32: read [Application note](#)

2/ Please contact supplier.

3/ with external MAC or with ESC1100/1200 (EtherCAT)

4/ Code is provided on request. Contact your local ST sales office.



STM8 – Industrial solutions

50

Provider	Solution name	Application	Model	Cost	Availability			
					S	A	L	T
Embex	<u>IO-Link</u>	Factory automation	Binaries	License + royalties	Y	N ¹	Y	N
MESCO	<u>IO-Link</u>	Factory automation	Binaries	License	Y	N ¹	Y	N
ST	<u>DALI</u>	Lighting	Source	Free	Y	N ¹	N	N
TMG	<u>IO-Link</u>	Factory automation	Source	License	Y	Y	Y	Y
TAPKO	KNX	Building automation	Binaries	License + royalties	N	N	Y	N

1/ Please contact supplier



Application field – Motor control

51

- **Control your 3-phase motor with top performance**

- Use of FOC algorithm allowing high energy efficiency and reduced noise emission
- Outstanding dynamic performance and speed range

- **Easy for designers**

- Full firmware customization through PC tool: ST motor control workbench

Often seen acronyms

BLDC	Brushless DC: permanent magnet motor with trapezoidal shaped B-EMF, FOC applicable
PMSM	Permanent magnet synchronous motor: with sinusoidal shaped B-EMF, FOC applicable
ACIM	AC induction motor: type of motor, FOC applicable
FOC	Field-oriented control: Mathematical technique used to achieve decoupled control of the flux and torque in a 3-phase motor.



STM32 – Motor control

52

Provider	Solution name	Model	Cost	Availability			
				F1	F2	F4	L1
ST	STM32 FOC PMSM SDK The STM32 PMSM FOC v3.0 is a software development kit that includes: <ul style="list-style-type: none">• Motor control library (sensors, algorithms...)• Motor control application (implementation of library, high-level MC commands)• Demo projects and utilities	Several models <ul style="list-style-type: none">• <u>Binaries</u>¹• Source (without FOC control loop)²• Source (with FOC control loop)³	Free	Y	Q1/13	Q1/13	N
ST	STMCWB: ST motor control workbench	<u>Binaries</u>	Free	Y	Q1/13	Q1/13	N
ST	STM32 ACIM SDK The STM32 ACIM v2.0 is a software development kit focusing on ACIM motors with Indirect FOC method.	Source ³	Free	Y	N	N	N

1/ Motor Control Library is provided in binary form

2/ Available on demand by contacting nearest ST sales office

3/ Available under NDA on demand by contacting nearest ST sales office



STM8 – Motor control

53

Provider	Solution name	Model	Cost	Availability			
				S	A	L	T
ST	STM8S Motor Control Firmware Library v1.0 Kit that includes: <ul style="list-style-type: none">• Scalar control of induction motor control for STM8S performance an access lines.• Scalar control (six-step) of permanent magnet brush-less motors (BLDC and PMSM)	<u>Source</u>	Free	Y	N	N	N
ST	STM8S Motor Control Firmware Library Builder GUI	<u>Binaries</u>	Free	Y	N	N	N



Application field – Automotive

54

- **More than hardware**

- In addition to microcontrollers dedicated to automotive equipment, ST proposes a set of firmware solutions

Often seen acronyms

J1939	Vehicle standard used for communication and diagnostics with vehicle components (e.g. agricultural machines).
J2602	USA variant of LIN
LIN	Local interconnect network: The LIN bus is a small and slow network system that is used as a cheap sub-network of a CAN bus to integrate intelligent sensor devices or actuators in today's cars. The LIN specification is enforced by the LIN-consortium, with the first exploited version being 1.1, released in 1999. Since then, the specification has evolved to version 2.1 to meet current networking needs. Bit rates vary within the range of 1 to 20 Kbit/s.
CAN	Controller-area network (CAN or CAN-bus): This is a standard vehicle bus designed to allow microcontrollers and devices to communicate with each other within a vehicle without a host computer. Possible bit rates from 125 Kbit/s up to 1 Mbit/s.

STM32 – Automotive solutions

- Warning: STM32 Device is not qualified for Automotive, but there are however some existing software solutions.

Provider	Solution name	Model	Cost	Availability			
				F1	F2	F4	L1
ArcCore	<u>ArcticCore Autosar stack</u>	Open Source or source	Free or License	Y	N ¹	N ¹	N ¹
Vector	<u>CANbedded</u>	Source	License	Y	N ¹	N ¹	N ¹
Vector	<u>CANbedded J1939</u>	Source	License	Y	N ¹	N ¹	N ¹

1/ Please contact supplier



STM8 – Automotive solutions

56

Provider	Solution name	Model	Cost	Availability			
				S	A	L	T
ST	J2602 Driver	Source	Free ¹	N ²	Q4/12	N	N
ST	<u>LIN 2.1 Driver</u>	Source	Free ¹	N ²	Y	N	N
Vector	<u>CANbedded</u>	Source	License	N ²	Y	N	N
Vector	<u>CANbedded LIN</u>	Source	License	N ²	Y	N	N
Vector	<u>CANbedded J1939</u>	Source	License	N ²	Y	N	N

1/ Available on demand. Ask your local ST Sales office.

2/ Please contact supplier

Development and execution environments

Some new environments modify traditional firmware development. These environments are based on high level object-oriented languages, coming with their own specific development environments.

- **Easier migration**

- ST and its partners support customers as they migrate to these new environments



Environment	Meaning
Java	Java object-oriented language and Eclipse development environment.
.NET	C# object-oriented language and Microsoft Visual Studio development environment. This is Microsoft .NET Micro Framework for microcontrollers.



STM32 – Development and execution environments

58

Provider	Solution name	Model	Cost	Availability		
				F1	F2	F4
IS2T	<u>Java for STM32</u>	License	Free on some targeted STM32, or royalties to IS2T	Y ¹	Y	Y
Mountaineer	<u>Microsoft .NET Micro Framework</u>	Open source (Apache 2.0)	Free	Y	Y	Y

1/ Upon request to IS2T.

Thank you

59



life.augmented

www.st.com